

GAME CHANGING

PERFORMANCE-BASED CONTRACTS FOR
CONTAMINATED PROPERTY

EXPECT RESULTS

IN MONTHS
NOT YEARS!


Biovation[®]
Environmental Services, LLC

SALES OFFICE:

2040 VIRGINIA AVE | FORT MYERS, FL 33901

BRETT CORWIN, VPBD 315-694-3315

TECHNICAL OFFICE:

720 NE 25TH AVE #38 | CAPE CORAL, FL 33909

TODD 239-898-7625 | DAVE 952-797-2827

WWW.BIOVATIONENV.COM



DON'T DELAY PROPERTY PLANS!

- Contaminated sites go from liability to profitability—with clean-up results within months instead of years*.
- A set performance-based cost is provided up front.
- No capital equipment costs.
- No lengthy operation and maintenance costs.

WE CAN HELP!

- We assist property owners, bankers, developers, realtors, and insurance companies.
- We can help you too!
- We've generated numerous treatment success stories over the past decade—proven results working in the field.

BIOVATION HAS CHANGED THE WAY FLORIDA CLEANS CONTAMINATED PROPERTY

Biovation provides unprecedented treatment results with a revolutionary bioremediation method called **ADVANCED BIO-CYCLE®**. We have a proven record of **SUCCESSFUL SITE CLEAN-UPS**—resulting in Site Rehabilitation Completion Order (SRCO). Our Advanced Bio-Cycle method delivers results—typically cleaning up sites in **MONTHS** not years*.

Effective against contaminants such as petroleum products (gas, oil, diesel), MTBE, organic pesticides, and chlorinated solvents; Advanced Bio-Cycle can be utilized in-situ or ex-situ in a variety of soils—including clay!

We have over 15 years of experience successfully cleaning up Florida sites. From assessments to clean up—we help turn properties around faster than anyone else and with **PERFORMANCE-BASED** contracts, we are paid only when you see results.


So feel good about the treatment option you choose, get results **FAST**, and get back to business with Advanced Bio-Cycle.

DISCOVER RAPID RESULTS AT EVERY PHASE

- Phase I & Phase II Site Investigations
- Site Assessments
- Remedial Action Plans
- Cleanup-in MONTHS not years*!
- Monitoring & Closure—Florida mandates 1 year of monitoring prior to issuing a SRCO.

* Denotes clean-up time from trailer treatment start date to Groundwater Cleanup Target Levels (GCTL) only. Typical site clean-up routinely takes 5 months or less, unique site conditions may take longer. Does not include SAR, RAP, or SRCO approvals.

Advanced Bio-Cycle® (ABC) Method

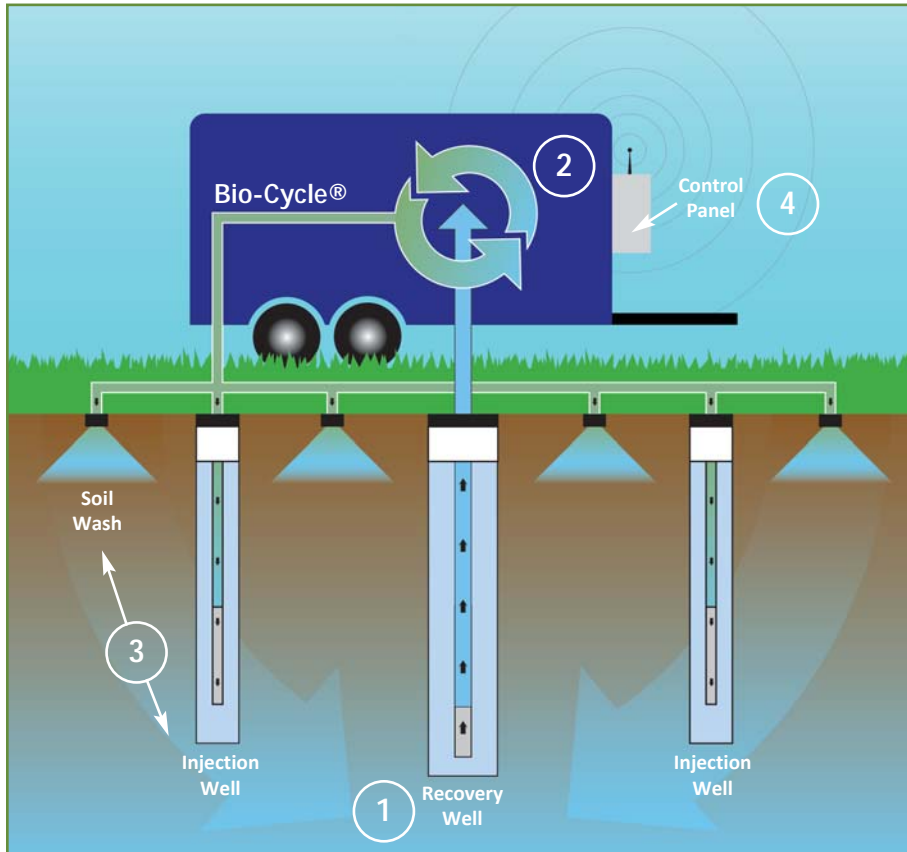

Advanced Bio-Cycle combines numerous treatment technologies into an advanced recirculation system. Quick—in and out—our trailer(s) arrive on site as needed and utilize flexible hoses to inject and extract water. No trenches to dig—our hoses are simply less disruptive to business and can even be driven over.

1. Contaminated groundwater is extracted from the aquifer through a recovery well.
2. Approved microbes, nutrients, and oxygen are added to the groundwater.
3. The enhanced groundwater is simultaneously re-injected into both the soil as a "soil wash" and into the groundwater via injection wells specifically designed to treat the soil and groundwater from the top down.
4. Advanced telemetry controls offer 24/7 monitoring and complete on- and off-site control.

Get Results Like These!

| SITE | FL ID # | SOIL TYPE | TREATMENT DURATION | SRCO* | CONTAMINANT(S) | TOP LEVELS (ppb) | END LEVELS (ppb) |
|--|---------|--------------------------|--------------------|-------|---|------------------|---------------------|
| Yeatter-Henderson #41 Lee Co., FL | 9201288 | Sand/Clay | 60 days | ✓ | Benzene | 1.26 | U |
| | | | | | Toluene | 2.47 | U |
| | | | | | Ethyl Benzene | 32.7 | U |
| | | | | | 1-Methylnaphthalene | 90.8 | U |
| | | | | | 2-Methylnaphthalene | 164 | U |
| | | | | | Naphthalene | 267 | U |
| First Fuel & Food Naples Co., FL | 8518236 | Sand/Indurated Limestone | 95 days | ✓ | Benzene | 2.8 | U |
| | | | | | Naphthalene | 130 | U |
| Doyles Marine Lee Co., FL | 9201078 | Sand/Organics/Clay | 11 months | ✓ | Benzene | 66.1 | U |
| | | | | | Toluene | 6030 | U |
| | | | | | Ethyl Benzene | 219 | U |
| | | | | | Xylenes | 1300 | U |
| | | | | | Naphthalene | 17.5 | <1 |
| Rodhouse Property Pinellas Co., FL | 9803781 | Clay/Organics | 2 months | ✓ | 1/8-inch Free Floating Product (Kerosene) | Free Product | Below Target Levels |
| Yole Vero Tire Indian River Co., FL | 8520272 | Sand/Organics | 8 months | ✓ | Benzene | 433 | U |
| | | | | | Toluene | 409 | U |
| | | | | | Ethyl Benzene | 761 | U |
| | | | | | Xylenes | 2280 | U |
| | | | | | 2-Methylnaphthalene | 50.6 | U |
| Naphthalene | 222 | <1 | | | | | |

* SRCO-Site Rehabilitation Completion Order issued by the FDEP following 1 yr. verification sampling.

** All sites were treated in-situ with the highest contaminated monitoring well reported. Top levels indicate baseline contamination levels prior to treatment.

† FL ID-Site identification number assigned and results verified by the FDEP.

‡ U-Undetectable

BIOVATION is a full service environmental consulting company specializing in bioremediation for the cleanup of gas, oil, diesel, MTBE, pesticides and chlorinated solvents in soil and groundwater.

With over 15 years of experience in bioremediation technologies and a decade of treatment success, our engineering staff and experienced field specialists are capable of assisting with the following regulatory phases of your cleanup:

- **Site Investigation**
- **Site Assessment**
- **Remedial Action Planning**
- **Remedial Action Modification**
- **Site Cleanup**
- **Site Monitoring**
- **Follow-up & Closure**

Biovation is approved by the State of Florida Department of Environmental Protection (FDEP) for environmental cleanups.

- **Florida Licensed Contractor (License #01332)**
- **Professional Engineering License (License #30848)**
- **Florida Licensed Geology Business (License #GB474)**
- **Advanced Bio-Cycle® is approved as an Innovative Technology**

No matter what stage of clean-up—even if you currently have treatment plans or equipment in place, Biovation can help you reach your treatment goals.



ASK **Randall Henderson, Jr** of Fort Myers, FL.
Randall benefited from the clean-up of his soil & groundwater contamination in sandy soil & clay in 60 days.

ASK **David Nowack** of North Fort Myers.
David benefited from the clean-up of his soil & groundwater contamination in sand, organics & clay in 11 months.

ASK **Michael Corradi** of Naples, FL.
Michael benefited from the clean-up of his soil & groundwater contamination in sand & indurated limestone in 95 days.



SALES OFFICE:

2040 VIRGINIA AVE | FORT MYERS, FL 33901

BRETT CORWIN, VPBD 315-694-3315

TECHNICAL OFFICE:

720 NE 25TH AVE #38 | CAPE CORAL, FL 33909

TODD 239-898-7625 | DAVE 952-797-2827

WWW.BIOVATIONENV.COM